

## TrueFRESH™ Balanced Ventilation System




- Removable Duct Collars
- Damperless Balancing
- Adjustable Hanging Straps
- Centralized Wiring and Speed Control
- Customizable
- Compact Size
- Meets ASHRAE 62.2 Standards
- 5-Year Warranty

**Defrost Control:** Exhaust Only Defrost  
**Materials:** Polypropylene 10 inch HRV Core  
**Electrical Ratings:** 120 Vac

**Frequency:** 60 Hz

| Material Number                               | Airflow Capacity (cfm)                         | Description                               | Sensible Effectiveness |
|-----------------------------------------------|------------------------------------------------|-------------------------------------------|------------------------|
| <b>Energy Star rated Ventilators</b>          |                                                |                                           |                        |
| VNT6150H1000/U                                | 150 cfm at external static pressure 0.4 in. wc | 150 cfm Heat Recovery Ventilator          | 0.8                    |
| VNT6200H1000/U                                | 200 cfm at external static pressure 0.4 in. wc | 200 cfm Heat Recovery Ventilator          | 0.84                   |
| <b>TrueFRESH™ Energy Recovery Ventilators</b> |                                                |                                           |                        |
| VNT5070E1000/U                                | 80 cfm at external static pressure 0.4 in. wc  | 70 cfm Compact Energy Recovery Ventilator |                        |
| VNT5150E1000/U                                | 159 cfm at external static pressure 0.4 in. wc | 150 cfm Energy Recovery Ventilator        | 0.67                   |
| VNT5200E1000/U                                | 188 cfm at external static pressure 0.4 in. wc | 200 cfm Energy Recovery Ventilator        | 0.69                   |
| <b>TrueFRESH™ Heat Recovery Ventilators</b>   |                                                |                                           |                        |
| VNT5070H1000/U                                | 75 cfm at external static pressure 0.4 in. wc  | 70 cfm Compact Heat Recovery Ventilator   |                        |
| VNT5150H1000/U                                | 150 cfm at external static pressure 0.4 in. wc | 150 cfm Heat Recovery Ventilator          | 0.78                   |
| VNT5200H1000/U                                | 200 cfm at external static pressure 0.4 in. wc | 200 cfm Heat Recovery Ventilator          | 0.71                   |

**Dimensions in inches (millimeters)**

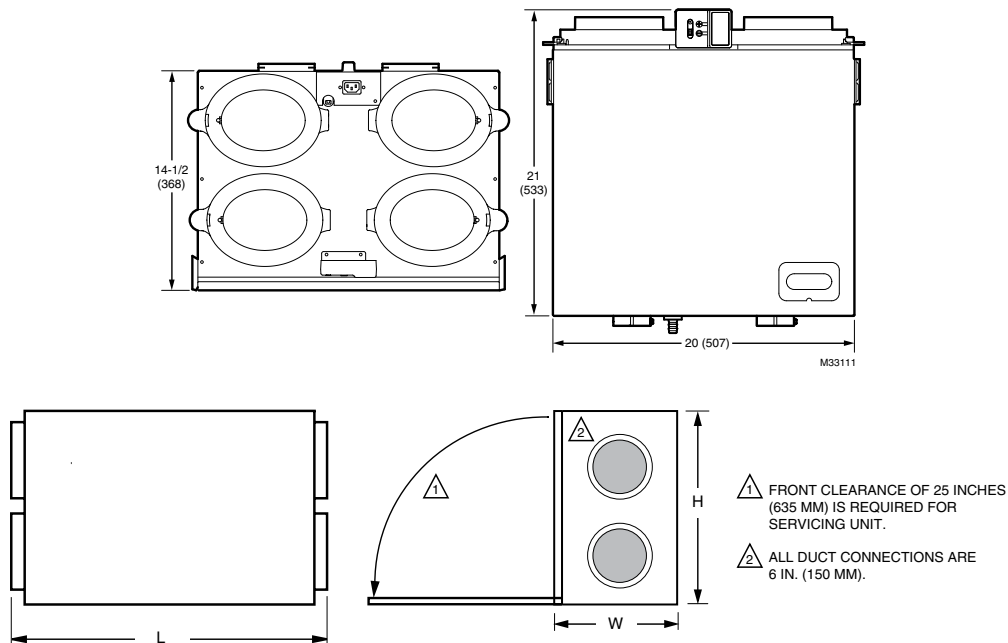

VNT5150H1000, VNT5150E1000 or VNT6150H1000: H = 22 1/2 in. (572 mm), W = 11 1/2 in. (295 mm), L = 29 1/2 in. (749 mm)  
VNT5200H1000, VNT5200E1000 or VNT6200H1000: H = 22 1/2 in. (572 mm), W = 16 1/2 in. (422 mm), L = 29 1/2 in. (749 mm)

M28919A